

SunStat® Connect

Installation and Operation Manual



Features:

- Floor temperature control with optional air-sensing mode
- Remote access via mobile app or web
- Touchscreen display with multiple color themes
- Easy-to-use programs and scheduling
- Outdoor temperature and weather display options
- Comprehensive help screens
- 3-Year warranty

Model# 107901, 107902, 107903, 107904, 107905

⚠ WARNING

Please be aware local codes may require this control to be installed or connected by an electrician.

Specifications:

Power supply 120/240 V (ac), 60 Hz, 3 watts

Maximum load 15 amps, resistive

Maximum power 1800 watts at 120 VAC

3600 watts at 240 VAC

GFCI Class A (5 milliamp trip)

Approvals UL 943, UL 873, UL 991, FCC Meets Class B: ICES-003 & FCC Part 15B

Ambient conditions 32°F to 86°F (0 to 30°C), <90% RH non-condensing

Floor Sensor Thermistor, 10k NTC type, 300 V jacketed cable, 15' long



⚠ WARNING



Read this manual BEFORE using this equipment.

Failure to read and follow all safety and use information can result in death, serious personal injury, property damage, or damage to the equipment.



Keep this manual for future reference.

This device complies with Part 15 of the FCC Rules and with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Consult the dealer or an experienced radio/TV technician for help.

Box Contents

- SunStat Connect Wi-Fi thermostat
- Floor sensor
- Screwdriver
- Installation manual
- 2 machine screws
- 5 wire nuts



Items Needed

- Electrical box (must be UL Listed and proper size)
- Wire nuts (must be UL Listed and proper size)
- Flexible or rigid conduit (if required, must be UL Listed and proper size)
- 12-gauge or 14-gauge electrical wiring cable (UL Listed)
- Nail plate
- Hot glue gun and hot glue

Location

- Thermostat is designed for indoor dry location only.
- Do not install where there is a draft, direct sun, hot-water piping, ducting or other cause for inaccurate temperature readings.
- Do not install where there is electrical interference from equipment, appliances, or other sources.
- Install away from all water sources such as sinks and at least 4' (1.2 m) away from showers and bathtubs.
- Consider easy access for wiring, viewing, and adjusting.
- Install at a suitable height, normally about 4-1/2' to 5' (1.4 m to 1.5 m) from the floor.

Important Safety Information



This is a safety-alert symbol. The safety-alert symbol is shown alone or used with a signal word (DANGER, WARNING, or CAUTION), a pictorial and/or a safety message to identify hazards.

When you see this symbol alone or with a signal word on your equipment or in this manual, be alert to the potential for death or serious personal injury.



This pictorial alerts you to electricity, electrocution, and shock hazards.

⚠ WARNING

This symbol identifies hazards which, if not avoided, could result in death or serious injury.

⚠ CAUTION

This symbol identifies hazards which, if not avoided, could result in minor or moderate injury.

NOTICE

This symbol identifies practices, actions, or failure to act, which could result in property damage or damage to the equipment.

Installation

⚠ WARNING

Installation must be performed by qualified persons, in accordance with local codes, ANSI/NFPA 70 (NEC Article 424) and CEC Part 1 Section 62 where applicable. Prior to installation, please consult the local codes in order to understand what is acceptable. To the extent this information is not consistent with local codes, the local codes should be followed. Regardless, electrical wiring is required from a circuit breaker or other electrical circuit to the control. It is recommended that an electrician perform these installation steps. Please be aware local codes may require this product to be installed by an electrician.

The following cautions must be observed:

NEVER forget to install the floor sensor included with the thermostat.

NEVER put the system into full operation until the tile or flooring installer verifies all cement materials are fully cured (typically two to four weeks after installation).

ALWAYS use copper supply conductors to the thermostat. Do not use aluminum.

ALWAYS wire all circuits as Class 1, electric light & power circuits.

ALWAYS wire all circuits with insulation rated 600V minimum.

ALWAYS mount this control to a grounded electrical box.

ALWAYS use power supply wires suitable for at least (194°F) 90°C.

ALWAYS seek help if a problem arises. If ever in doubt about the correct installation procedure to follow, or if the product appears to be damaged, the factory must be called before proceeding with the installation.

⚠ WARNING



To prevent the risk of personal injury and/or death, make sure power is not applied to the product until it is fully installed and ready for final testing. All work must be done with power turned off to the circuit being worked on.

To reduce the risk of electric shock, do not connect to a circuit operating at more than 150 V to ground.

Power Supply

Pull power supply wiring to the control location.



- Leave about 6 to 8" (15 to 20 cm) of wire for connections.
- This wiring should be size 12 or 14 AWG, in compliance with local code requirements.
- A qualified person should run a dedicated circuit from the main circuit breaker panel to the control location. If a dedicated circuit is not possible, it is acceptable to tap into an existing circuit. However, there must be enough capacity to handle the load (amps) of the floor heating system being installed, and any appliance likely to be used on the circuit such as a hair dryer or vacuum cleaner.
- Avoid circuits that have ballasted lighting, motors, exhaust fans, or hot tub pumps to reduce the likelihood of interference.
- The circuit breaker should be rated 20 amps for total circuit loads up to 15 amps. A 15-amp circuit breaker may be used for total circuit loads up to 12 amps.
- A GFCI (ground-fault circuit interrupter) or AFCI (arc-fault circuit interrupter) type circuit breaker may be used, but is not necessary.

⚠ WARNING

Make sure 120 VAC is supplied to 120 VAC cables and 240 VAC is supplied to 240 VAC mat or wire. Otherwise, dangerous overheating and a fire hazard could result. Do not exceed 15-amps on this control.

Bottom Plate Work


- Drill or chisel holes at the bottom plate as indicated. One hole is for routing the power lead conduit and the other is for the thermostat sensor. These holes should be directly below the electrical box(es).

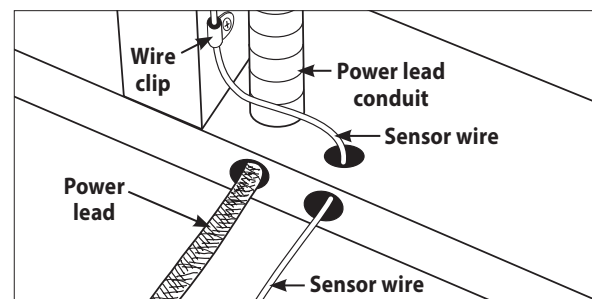

For retrofit installations, cut out drywall and chisel out the bottom plate to route wires to control.

SunStat Sensor Installation

- The SunStat sensor can be installed with or without electrical conduit depending on code requirements. Conduit is recommended for added protection against nails and screws.
- Do not place the sensor in the same conduit as the power leads to avoid possible interference. Open a separate knock-out in the bottom of the thermostat box. Feed the sensor (and conduit, if used) through the knock-out, down through the cut-out in the bottom plate, and out into the floor where the heating cable will be installed.
- If the sensor wire needs to be secured to the wall stud, wait until after the wire or mat and sensor are completely installed on the floor.
- At the sensor location, measure at least 1' into the heated area. Mark the spot where the sensor will be attached to the floor. Be sure to place the sensor exactly between two of the heating wires. Ensure the sensor wire does not cross over any heating wires.
- Do not locate the sensor outside the heating area or in a gap between heating wires that is wider than the rest of the floor. Do not locate the sensor where direct sun, hot-water piping, heat duct, or lighting below will cause inaccurate temperature reading. Do not locate the sensor where an insulating item such as a rug is likely to be placed.
- To make sure the sensor tip does not create a high spot in the floor, it may be necessary to chisel a channel into the floor and lay the sensor tip into the channel. Hot glue the tip into place.
- Do not cut the sensor wire or remove the black cable protector. Strip the wire ends to 1/8" long.

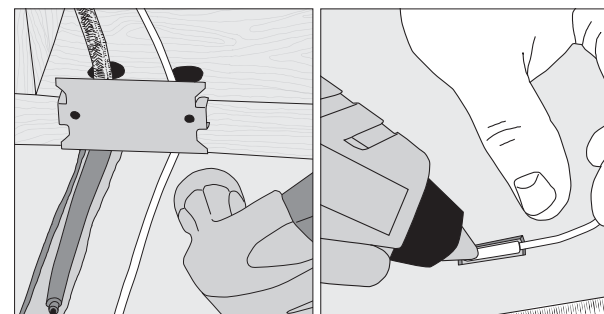

Floor Heating Mat or Cable Power Lead Installation

- The shielded power lead can be installed with or without electrical conduit (recommended for added protection against nails or screws), depending on code requirements.
- Remove one of the knock-outs in the electrical box to route the power lead. If electrical conduit is not required by code, install a wire collar to secure the power leads where they enter the box. If conduit is required by code, install 1/2" (minimum) conduit from the bottom plate up to the electrical box. For multiple power leads (multiple cables), install 3/4" conduit.
- Secure a steel nail plate over the cutout in the bottom plate to protect the wires against baseboard nails later.

SunStat Relay Rough-in Wiring

A SunStat Relay C3 is used when more than 15 amps must be controlled by one SunStat thermostat. The SunStat Connect is only compatible with the SunStat Relay C3. Do not use other models.

- Pull 18 AWG to 24 AWG 2-conductor shielded wire from the relay location to this control location. The wire may be up to 100' (30 m) long.
- Strip the wire ends to 1/8" long.

Refer to the instructions provided with the SunStat Relay C3 for additional details.

Home Automation System Rough-in Wiring


A short or 24 VAC applied between the Away and Com terminal will switch the thermostat between the 'Away' temperature and regular operation.

- Pull 18 AWG to 24 AWG 2-conductor shielded wire from the home automation control to this control location.
- Strip the wire ends to 1/8" long.

Thermostat Wiring


Before connecting the wires to the back of the thermostat, detach the display front from the base.

While holding the base section in one hand, pull the lower half of the display front towards you to pivot it away from the base.



Using the wire nuts included with the thermostat:

- Connect the ground wire from the power supply to the ground wire from the floor heating power lead. If the electrical box is metal, use a short length of wire to connect ground wires to the bonding screw.
- Connect the white wire labeled LOAD 2 on the thermostat to the white (or blue for 240 VAC) wire from the heating mat or cable power lead.
- Connect the black wire labeled LOAD 1 on the thermostat to the black wire from the heating mat or cable power lead.
- For 120 VAC connections, the L wire connects to the black (L) hot conductor from the breaker panel. The N wire connects to the white (N) neutral conductor.
- For 240 VAC connections, the L1 connects to one side of the 240 VAC supply from the breaker panel and the L2 to the other.

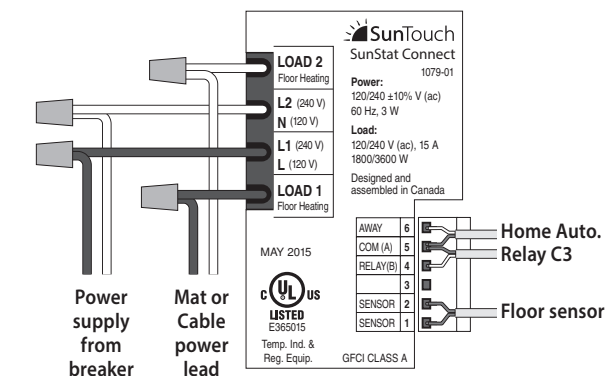

Sensor, relay and home automation connections are made to the terminal block by inserting the wires into the square openings and tightening the screws on the side.

- Connect the sensor wires to the SENSOR terminals on the thermostat. These connections are not polarity sensitive.
- For a SunStat Relay C3, connect 2 wires from the relay to the Com and Relay terminals on the thermostat. Ensure the Com wire at the relay is the same conductor connected to the Com terminal on the thermostat.
- Connect the Away and Com terminals to the appropriate conductors from a home automation system. Refer to the instructions for the home automation control before making these connections.

⚠ WARNING

Make sure the wire connections are secure by gently tugging on them. Otherwise, arcing could occur, causing dangerous overheating and a possible fire hazard. For added security, overwrap each wire nut connection with electrical tape.

Finish Thermostat Installation

- Ensure all connections are secure.
- Carefully press the wires back into the electrical box. Do not use the control to push them.
- Use the included screws to attach the thermostat base to the electrical box. Do not overtighten.
- When re-attaching the display front, line up the top edge with the base, then rotate the bottom towards the base. Ensure the pins are not bent when connecting.


See over for operation details

NOTICE

Make sure the mortar has had time to fully cure before operating the system for more than a brief test.

Touchscreen Operation

Touch the time, date or temperature to quickly access settings. Advanced settings are accessed by touching the Setting  button.

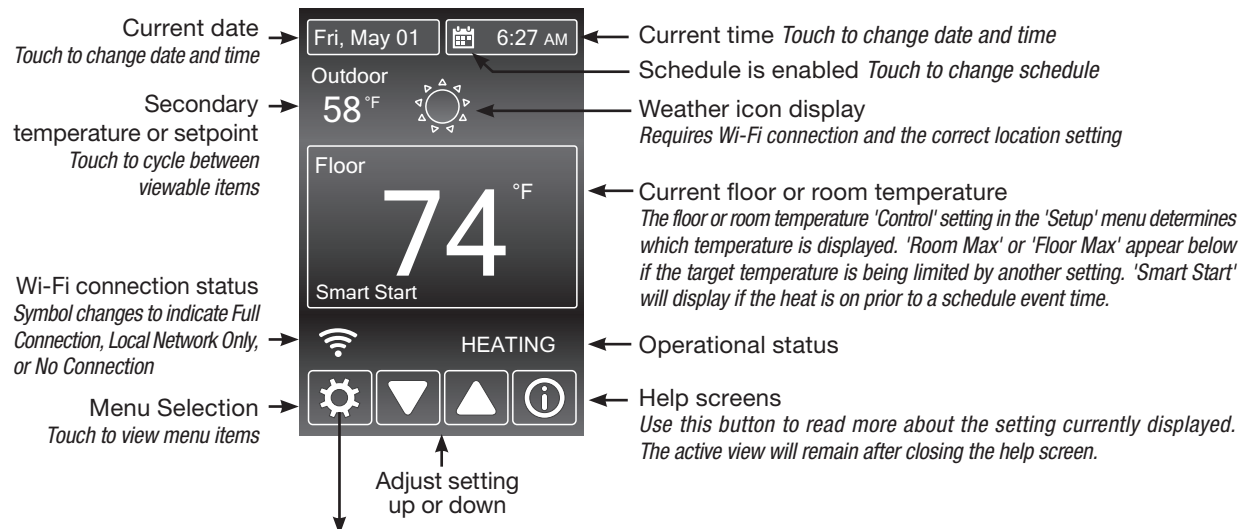

Menus

Press  to accept. Press  to return to the previous view.

TIME

Time & date	Set the time and date
Options	Time format, time source, time zone and daylight savings settings

SETUP

Floor Maximum	40°F to 99°F (4.5°C to 37°C)
Room Maximum	Off, 60°F to 95°F (15.5°C to 35°C)
Control	Floor, Room
Set Floor Away	Off, 40°F to 99°F (4.5°C to 37°C)
Set Room Away	Off, 40°F to 95°F (15.5°C to 35°C)
Weather Compensation	Off, On
WWSD	Off, 40°F to 100°F (4.5°C to 37.5°C)

WIFI

WiFi	On, Off
Network SSID	Select name and enter password
Postal/Zip	View or edit postal/zip code
Register Device	Generate code to enable remote connection
Deregister Device	Select to deauthorize remote access

SCHEDULE

Set Wake, Leave, Return, Sleep event times and temperatures	
New Program	Create new program schedule
Smart Start	Off, On
Program	Off, On

DISPLAY

Temperature Units	°F, °C
Brightness Wake/Return	Off, 30 to 100%
Brightness Leave/Sleep	Off, 30 to 100%
Theme	Light, Blue, Night, Latte, Espresso
Languages	English, Spanish, French
Clean Screen	No, Yes

TOOLBOX

Error	Displays error message if one exists
Heat Hours	Displays operating hours
Room Offset	-5° to +5°
Software Version	Displays type and software version
Load Defaults	Load factory defaults into memory

HOME Exit menu system

 Power off SunStat. Touch display for power on option.

Away Settings

- In the Setup menu, the Floor Away or Room Away temperature can be selected, or set to Off (the default).
- The Away override is controlled using the mobile application, website or a home automation system. When the thermostat is set to Away by the mobile application, a cancel button displays on the thermostat.

Weather Compensation

When set to On, the thermostat automatically adjusts heating operation to compensate for changing weather conditions.

Warm Weather Shut Down

- When enabled, this feature saves energy by not operating the floor heating when the outdoor temperature is above the setting. Select a WWSD temperature, or Off in the Setup menu.

WiFi Menu

WIFI

- Change the Wi-Fi setting to On to enable remote access.

Network SSID

- Select the name of the Wi-Fi network the thermostat should connect to and a password if required.

Postal/Zip code and address information

- Enter a postal or zip code if needed to the correct the location settings (used for outdoor temperature and weather icons).

Register Device


- Select to generate a code to link the SunStat to a user account created at SunStatConnect.com.

Deregister Device

- Select to deauthorize existing account access if a change in users is required. To provide access to a new account after using this setting, use the 'Register Device' option to create a new code.

Schedule Menu

By default, the thermostat includes one weekday program, a Saturday program and a Sunday program.

- Press  to switch between programs.
- To edit the time or temperature for a wake, leave, return, or sleep event, touch the displayed time or temperature. Choose 'Skip' to not use an event.
- To divide the schedule by a different grouping of days, select 'New Program'. You will be prompted to OK deleting the current set of programs.
- Select days to group together in the new programs.
- Every day of the week requires selection on it's own or within a group before exiting the program settings.

SmartStart

- SmartStart anticipates the time required to provide a scheduled temperature by the start of an event. When Smart Start is set to Off, additional time is required to reach the set temperature.

Program

- Set to On to follow the schedule. Set to Off to use the same temperature all of the time.

Display Menu

The Display menu allows you to customize preferred display units, brightness, color themes and language options. A Clean Screen feature enables cleaning without affecting operation.

Toolbox Menu

Error

- If there is currently an error, it will display as the first item.

Heat Hours

- Displays the heating duration by day or month.

Room Offset

- This feature can offset operation to account for over or under heating present at the sensor location.

Software Version

- Displays product software version.


Load Defaults

- Select 'yes' to reload the factory default settings.

NOTICE

Before first using the Wi-Fi features of this product, you must accept the Terms of Use, as amended from time to time and available at SunStatConnect.com/terms. If you do not accept these terms, this product can still be used without Wi-Fi features.

Remote Access Connection

- The Wi-Fi connection must be successfully setup before remote access is available.
- Enter the following URL in your web browser: 'SunStatConnect.com'
- Create a new account or log in with your credentials.
- To link a SunStat to the account, touch the  button on your thermostat then select the 'WiFi' menu.
- Touch the 'Register Device' link to generate a code.
- Enter this code in the 'Connect Device' section of your account.
- Once connected, settings can be adjusted at any time by logging in to your remote access account at 'SunStatConnect.com'.
- Use the 'Deregister Device' option to deauthorize access from existing accounts if a change in users is required.

Troubleshooting Guide

It is strongly recommended that a qualified, licensed electrician install the heating cables and related electrical components. If problems with the system arise, please consult the troubleshooting guide below.

⚠ WARNING

Any electrical troubleshooting work should be performed with the power removed from the circuit, unless otherwise noted.

Problem	Possible Cause	Solution
Wi-Fi is operational but weather icon is missing or wrong.	Location detected is incorrect or unknown.	In the 'WiFi' menu, enter a zip or postal code to correct the location. If the code is not recognized, try a code from an established location nearby.
'Heating' is displayed, but floors do not feel warm.	Set temperature is too low to feel warm to the touch.	Increase the temperature setting in small increments.
	Incorrect or faulty wiring	Check the floor temperature displayed on the screen. If this temperature does not increase while 'Heating' is displayed, the sensor and power lead wiring will need to be checked by a certified electrician.
The set temperature was increased but 'Heating' is not displayed on the screen.	Temperature may be limited by another setting.	'Max' will display on the screen when you try to adjust a temperature that is limited. Adjust the Floor Max, Room Max and WWSD settings if they are too low.
	Temperature at the floor or room sensor is already at the setting.	'Heating' only displays when the sensed temperature is lower than the set temperature and heat is actively operating.
Display is not on.	Thermostat is in off mode.	Touch the screen center. Touch the button to turn the thermostat on.
	Power from the breaker is off.	Check the breaker or fuse in the electrical panel supplying power to the SunStat.
Wi-Fi symbol is not displayed on the thermostat.	Incorrect or faulty wiring	Have the sensor and power lead wiring checked by a certified electrician.
	Router is unavailable.	Check the power and connections on the router and reset if needed.
	Router is not allowing access.	Check the WiFi settings entered in the thermostat.
Half of Wi-Fi symbol is displayed.	Access to router is OK, but Internet access is not available.	Check the settings in the router to ensure access is allowed.
Heat is on before the scheduled time.	The settings are not readable by the thermostat.	Check the router settings and determine whether other devices connected through the router have internet access. Check power on modem.
Out of memory error	The SmartStart feature is enabled.	'Smart Start' will display on the screen. If preferred, turn off the SmartStart feature in the Schedule menu.
Floor sensor error	The settings are not readable by the thermostat.	Select 'Load Defaults' from the Toolbox menu.
Room sensor error	Wiring or sensor is faulty.	Have a certified electrician check the wiring and sensor resistance. Replace the sensor if necessary.
	Internal sensor error in thermostat	Reload factory defaults. If error still exists, replace the product according to the warranty instructions.

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.
For more information: Watts.com/prop65

Limited 3 Year Warranty

Watts Radiant warrants this control (the product) to be free from defect in material and workmanship for a period of (3) years from the date of original purchase from authorized dealers. During this period, Watts Radiant will replace the product or refund the original cost of the product at Watts Radiant's option, without charge, if the product is proven defective in normal use. Please return the control to your distributor to begin the warranty process.

This limited warranty does not cover shipping costs. Nor does it cover a product subjected to misuse or accidental damage. This warranty does not cover the cost of installation, diagnosis, removal or reinstallation, or any material costs or loss of use.

This limited warranty is in lieu of all other warranties, obligations, or liabilities expressed or implied by the company. In no event shall Watts Radiant be liable for consequential or incidental damages resulting from installation of this product. Some states or provinces do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so the above exclusions or limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights that vary from state to state.

Watts Radiant Customer Support

USA Toll-free: (800) 276-2419
USA Fax: (417) 864-8161
WattsRadiant.com
Canada Toll-free: (888) 208-8927
Canada Fax: (905) 332-7068
Watts.ca

SunTouch Customer Support

USA Toll-free: (888) 432-8932
USA Fax: (417) 831-4067
Canada Toll-free: (888) 208-8927
Canada Fax: (905) 332-7068
Latin America Tel: (52) 81-1001-8600
Latin America Fax: (52) 81-8000-7091
SunTouch.com